

# Specifications

		2605-4R	2615-2R	2615-4R	2625-4R	2635-4R
	Drive type	4WD	2WD	4WD	4WD	4WD
<b>Engine</b>	Engine model	Simpson S325.3	Simpson S325E		Simpson SJ436E	Simpson TSJ436E
	Number cylinders/cc	3/2500	3/2500		4/3600	4 Turbo/3600
	Engine power kW (hp)	28.7 (38.5)	35.08 (47.7)		47 (63)	55.2 (74)
	@ rated speed (rpm)	2000	2250		2300	2200
	Speed control	Manual	Manual		Manual	Manual
<b>PTO</b>	PTO kW (hp)	23.9 (32)	30.62 (41.5)		40.3 (54)	44.7 (60)
	Type	Independent	Independent		Independent	Independent
	Speeds	540	540		540	540
	Shaft	Flanged shaft	Flanged shaft		Flanged shaft	Flanged shaft
	Configuration	6 spline	6 spline		6 spline	6 spline
<b>Transmission</b>	Type	Constant mesh	Constant mesh		Constant mesh	Constant mesh
	Speeds	8F x 2R	8F x 2R		8F x 2R	8F x 2R
	Speed range	1.6 – 27.0 km/h	1.6 – 27.0 km/h		1.7 – 29.3 km/h	1.7 – 29.3 km/h
<b>Hydraulic System</b>	Description	Open centre	Open centre		Open centre	Open centre
	Pump type	Twin pumps	Twin pumps		Twin pumps	Twin pumps
	Max lpm (Aux & 3-point)	55	60.3		61.8	61.8
	Remote outlets (optional)	1 or 2 rear valves	1 or 2 rear valves		1 or 2 rear valves	1 or 2 rear valves
<b>Three Point Linkage</b>	Type	Cat I & II cross drilled	Cat I & II cross drilled		Cat I & II cross drilled	Cat I & II cross drilled
	Stabilisers	Chain type	Chain type		Chain type	Chain type
	Lift – kg @ position	1450@BE	1450@BE		2050@BE	2050@BE
<b>Brakes and Steering</b>	Brake type	Dry drum	Wet disc		Wet disc	Wet disc
	Steering type	Hydrostatic	Hydrostatic		Hydrostatic	Hydrostatic
<b>Tyre Matrix</b>	Rear tyres	13.6 – 28	13.6 – 28	13.6 – 28	16.9 – 28	16.9 – 28
	Front tyres	7.5 – 16	7.5 – 16	10.5/80 x 18	9.5 x 24	9.5 x 24
<b>Dimensions/ Weight</b>	Width (mm)	1653	1670		1880	1854
	Height (mm)	2345	2345		2395	2395
	Length (mm)	3285	3310	3310	3590	3590
	Wheel base (mm)	1937	1937	1937	2066	2066
	Weight (kg)	2130	2020	2290	2550	2665
<b>Capacities</b>	Fuel (litres)	38	38		38	65



MASSEY FERGUSON

38-74 HP

MF2600

Massey Ferguson Powerful Utility Tractors – Proven power and efficiency



facebook.com/MasseyFergusonGlobal  
 twitter.com/AGCOcorp  
 youtube.com/MasseyFergusonVideo  
 blog: agcocorp.com

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.



MASSEY FERGUSON

**AGCO** MASSEY FERGUSON is a worldwide brand of AGCO.



# Massey Ferguson 2600


## Mixing tradition with style.

The Massey Ferguson 2600 Series is a rugged line of utility tractors that are built to get the job done. With models ranging from 38 to 74 engine horsepower, the MF2600 Series tractor meets the requirements of today's demanding marketplace. With innovative styling, user-friendly controls, and a roomy operator's area, the MF2600 lineup delivers a level of comfort that is surprising in a utility tractor. Equipped with a Simpson 3 or 4 cylinder diesel engine that is either naturally

aspirated or turbocharged, these reliable machines will tackle any job at hand. The legendary Massey Ferguson 3-point hitch system puts the operator in total control of a wide range of implements, from mowing to loader work, grading, and tilling. The basic philosophy behind the MF2600 Series tractor is to provide an efficient, dependable, and durable product for the value-minded customer.

## Features

- 1 Pendant-style clutch pedals – just like the ones in your truck – give you plenty of leg room.
- 2 The straddle-mount footstep platform lets you sit closer to the ground and makes getting on and off the tractor easier.
- 3 The hand parking brake makes it easy to engage the brakes before leaving the platform.
- 4 Glide forward or back on the spring-suspended seat, then turn the dial to adjust the weight, ensuring custom fit.
- 5 Retractable seat belt and the folding ROPS (rollover protection system) combine to provide added safety.
- 6 Position control lever lets you operate the category I and II, 3-point hitch with increased precision.
- 7 Draft control lever allows you to set amount of draft forces through the 3-point hitch top link.
- 8 Standard differential lock on models MF2615, MF2625 and MF2635 gives you extra traction in soft or wet ground conditions.
- 9 Choose from four gears with the gear selector lever.
- 10 The range selector allows you easy shifting between field range and road range.
- 11 Hand throttle for when you need to maintain a set engine RPM for PTO applications such as mowing.
- 12 Foot throttle gives you solid control of engine speed when your hands are busy operating other controls, like a loader joystick.
- 13 Our suspended brake pedals can be used independently to assist you with your turns or they can be combined and pushed down simultaneously for maximum braking efficiency when traveling on the road.
- 14 Gauges for alternator charge, engine oil pressure, water temperature, fuel level and engine RPM are colour-coded in red and green, so it's easy to see when you're in normal operating ranges.

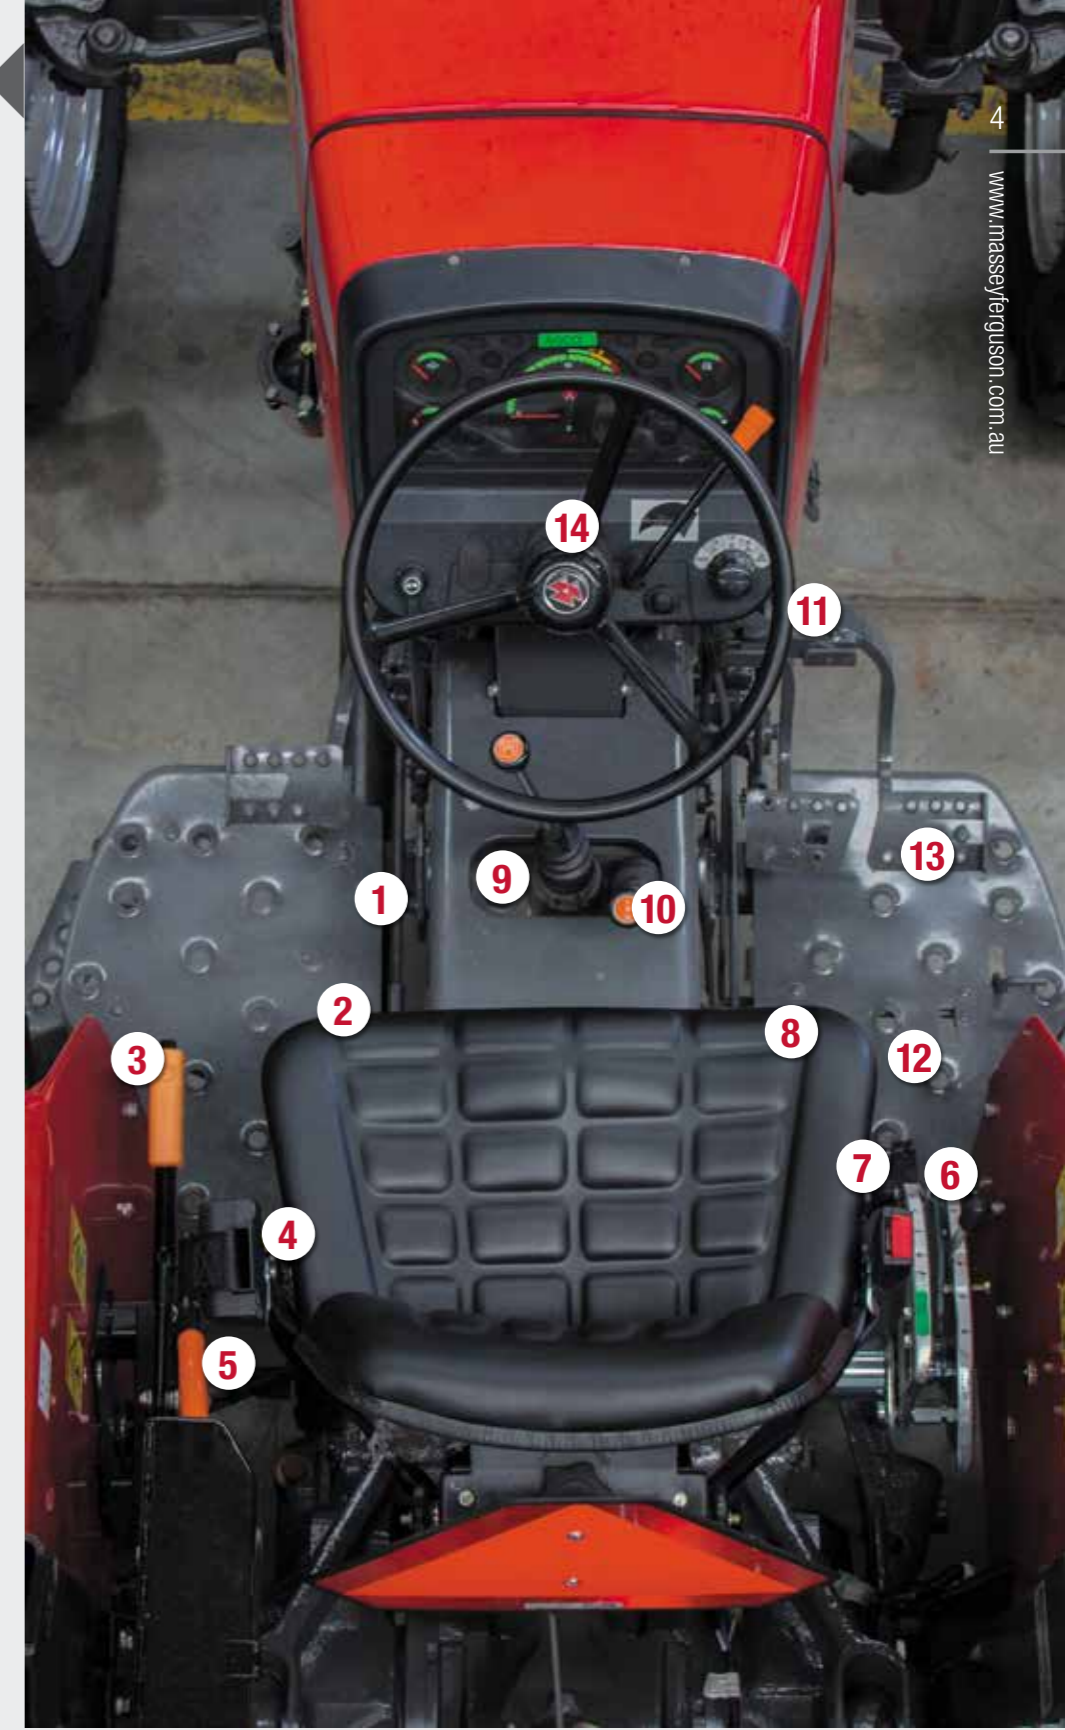

## MF2600 Features:

**Adjustable Drawbar**  
The drawbar, standard in all MF2600 tractors, is adjustable for height, length and offset to suit implements. This feature adds to the tractor's versatility in that it can adapt to tow most types of equipment safely.

**Transmission**  
The simple 8 x 2 constant mesh transmission is simple in design and operation, and is extremely efficient and durable.

**Three Point Linkage**  
The lower link arms feature cross drilled ball ends to suit both category I and II implements, reducing the time it takes to change implements. The MF2600 Series linkage capacity ranges from 1450 kg to 2050@BE.

**Independent PTO**  
Standard on all models is an IPTO, the main tractor clutch is independent of the PTO driveshaft. The IPTO incorporates an internal multi-disc clutch that is mechanically engaged.

**Single Piece Bonnet**  
Designed with ease of service in mind. The single piece bonnet and easily accessible check points allow the operator to make routine checks quickly, so the tractor spends more time working.

**Simpson Diesel Engines**  
With a heritage dating back more than a century much of the engineering process and know how comes from being a licensed manufacturer of the legendary Perkins engine. The influence of Perkins engines can readily be seen in the design and performance of all Simpson engines.

**Options**  
A choice of either 2WD or 4WD. With a 55° steering angle and 11° of oscillation, your 2WD MF2600 tractor can turn tight and keep both front wheels firmly planted on the most uneven terrain.

**Loader Capabilities**  
The MF2600 Series can all be equipped with hydraulically operated front end loaders. Engineered to match the MF2600 and auxiliary hydraulic flow rates up to 42 litres a minute, loader work is completed in minimum time.

