

*Shelbourne*  
REYNOLDS

HEDGE TRIMMER



[SHELBOURNE.COM](http://SHELBOURNE.COM)

200 / 300 / 400 SERIES










## 200/300/400 SERIES TECHNICAL DATA

FIND US:



TECHNICAL SPECIFICATIONS	250	350	357	450	457
<b>CONTROLS:</b>					
Progressive Cable Control	Standard	Standard	Standard	Standard	Standard
Oil Remote Joystick Control	Optional	Optional	Optional	Optional	Optional
<b>HYDRAULICS:</b>					
Standard Power Oil Capacity	170 litres	170 litres	170 litres	170 litres	170 litres
Independent Hydraulics	Standard	Standard	Standard	Standard	Standard
<b>ARM FEATURES:</b>					
Parallel Boom Geometry	N/A	Standard	Standard	Standard	Standard
Boom Type	Fixed	Fixed	Fixed	Fixed	Fixed
Hydraulic Slew	Fixed	Fixed	Fixed	90°	90°
Arm Break Back	Standard	Standard	Standard	Standard	Standard
Head Float	Standard	Standard	Standard	Standard	Standard

TECHNICAL SPECIFICATIONS	250	350	357	450	457
<b>FLAIL HEAD FEATURES:</b>					
Twin 'V' Belt Head System	Standard	Standard	Standard	Standard	Standard
1.2m Head	Standard	Standard	Standard	Standard	Standard
Drive System Flow	75 l/min	75 l/min	75 l/min	75 l/min	75 l/min
Drive System Pressure	250 bar	250 bar	250 bar	250 bar	250 bar
Head Angling	257°	257°	257°	257°	257°
Roller Diameter	101mm	101mm	101mm	101mm	101mm
Hydraulic Roller	Optional	Optional	Optional	Optional	Optional

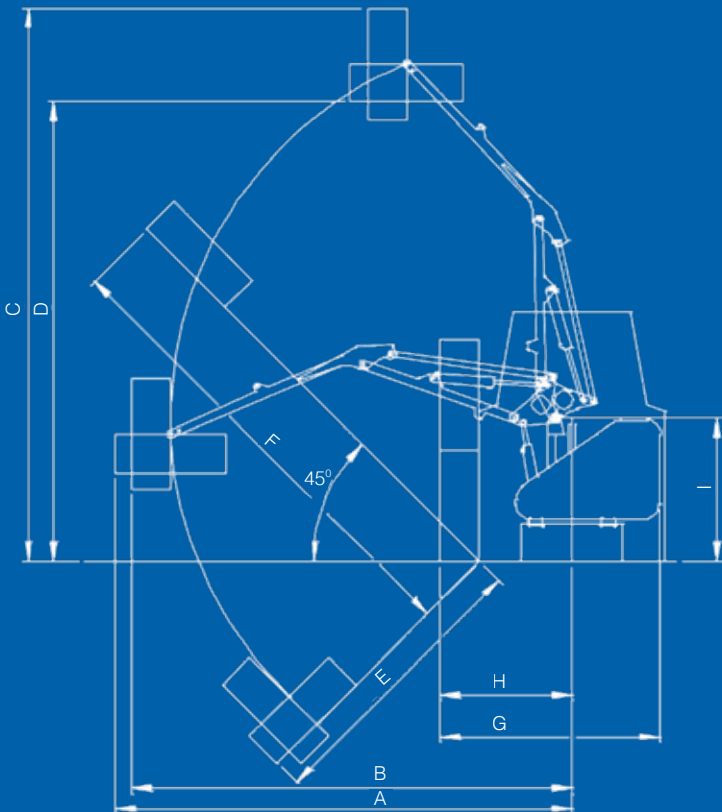

TECHNICAL SPECIFICATIONS	250	350	357	450	457
<b>WEIGHTS:</b>					
Machine Weight inc Head & Oil	1080kg	1130kg	1160kg	1190kg	1220kg
Min Tractor Weight	3250kg	3250kg	3500kg	3500kg	3500kg
Min Tractor	75hp	75hp	80hp	80hp	85hp
<b>MOUNTING SYSTEM:</b>					
3pt Mounting	Optional	Optional	Optional	Optional	Optional
Axle Mounting	Optional	Optional	Optional	Optional	Optional
<b>ACCESSORIES:</b>					
Road Lights	Standard	Standard	Standard	Standard	Standard

REACH DIMENSIONS	250	350	357	450	457
Max Reach (A) Head Horizontal	5.16mt	5.16mt	5.84mt	5.16mt	5.84mt
Max Reach (B) Head Vertical	4.54mt	4.54mt	5.27mt	4.54mt	5.27mt
Max Height (C) Head Vertical	6.04mt	6.25mt	6.72mt	6.25mt	6.72mt
Max Height (D) Head Horizontal	4.52mt	4.52mt	5.28mt	4.52mt	5.28mt
Max Reach (E) Head Downwards	3.30mt	3.30mt	4.11mt	3.30mt	4.11mt
Max Reach (F) At 45° Up	5.02mt	5.35mt	6.01mt	5.35mt	6.01mt
Min Siding Width (G) To Tank	2.35mt	2.35mt	2.35mt	2.35mt	2.35mt
Min Siding Width (H) To Centre	1.40mt	1.40mt	1.40mt	1.40mt	1.40mt
Height (I) To Pivot	1.20mt	1.55mt	1.55mt	1.55mt	1.55mt

ALL DIMENSIONS ABOVE WITH 1.2MT HEAD